


## DC-DC CONVERTER

Rev: 00, Mar 2018, [www.variturndefence.com](http://www.variturndefence.com)

**+/-15V, 10A, 150W**

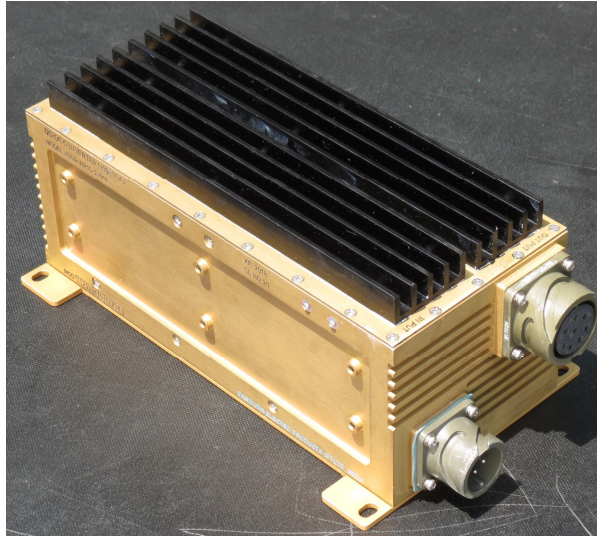

**Size : 10.22 x 5.35 x 4.18 inches (259.5 x 136 x 106.3mm)**

### Key Features:

- Wide input range: 100 to 400 VDC.
- Output : +/-15VDC.
- High Efficiency.
- Very low ripple and noise.
- < 0.2 % of line regulation
- < 0.5 % of load regulation
- < 40mVp-p of ripple.
- < 240mVp-p of noise.
- Approx 100 mSec Holdup time.
- Fixed frequency switching operation.
- Isolated.
- UVLO (Under Voltage Lock Out).
- OVLO (Over Voltage Lock Out).
- Reverse polarity protection.
- Short circuit protection.
- Over Temperature Shutdown.
- -10<sup>o</sup> to +55<sup>o</sup>C operation.
- Compact in size.
- **Meets MIL-STD-461E (EMI/EMC)**
- **Meets JSS 55555 (Environmental)**

### Description:

These series of DC/DC converters are available in Customized package and Model: VI150-WR15-2V1C1 is capable of driving up to 150W. These DC/DC converters can accept an input voltage rail between 100VDC and 400VDC and delivers a constant output voltage.

No external capacitors/ resistors required and it has reliable and robust design with following protection features: Reverse polarity protection, UVLO, OVLO, Output short circuit , Over Temperature Shutdown.

### Applications:

- Industrial power supplies.
- Telecommunication systems.
- Military.
- Navy
- Submarine.
- Ruggedized systems.

### VARITURN ELECTRO PRODUCTS (P) LTD.

196, Phase-II, IDA, Charlapally, Hyderabad-500051, Telangana, INDIA.  
Tel: +91 40 27261308, 32443011, Fax: +91 40 27261309